



Schlage Utility Software (SUS) on the Handheld Device (HHD)


Schlage Utility Software (SUS) is designed specifically for use on the Handheld Device (HHD) as the link between your access control management software and Schlage electronic offline and networked locks and accessories. This solution consolidates and simplifies programming and managing your access control system.

The SUS and HHD is used to initialize, configure and test product operation, and also provides an easy way to manage people, audits, locks and other network panel interface devices for simple access control. The intuitive screen layout for the SUS provides easy navigation during use.

For offline products the SUS is utilized to transfer access control data, such as authorized user lists, via the HHD to the locks. The SUS is also utilized to download audit trail information from offline devices to the HHD and then transfer that data to the access control management software.

In addition the SUS can configure other networked electronic devices (including PIM and PIB) and update firmware revision updates to the devices as desired.

The HHD connects with Schlage AD-Series electronic locks and accessories via a USB interface and utilizes Active Synch or Win Mobile Device Manager to communicate with your PC via the USB port. The HHD is also able to connect to the SPED, KC2, CM, CL, CT500, CT1000, CL Controller and WA-Series PIMs via a serial cable connection.

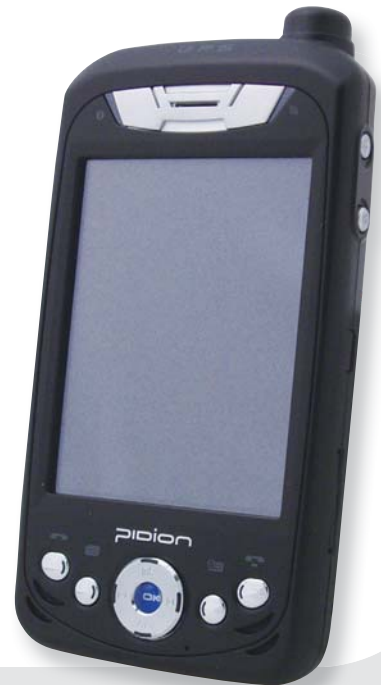

Features

- Handheld Device with Schlage Utility Software installed
- Touch Screen operation
- Initialize Lock and Accessories with SUS
- Configure and Test Devices

FEATURES AND SPECIFICATIONS

Schlage Utility Software

- Initialize Lock and Accessories
- Field Configure Devices
 - Credential Reader Formats
 - Lock Function
 - Unlock Period
 - Failure Mode
 - Audible Alarm ON/OFF
- Off-line Devices
 - Manage up to 100 unique door files
 - Retrieve Audit trails from up to 100 devices
- Networked Devices
 - Communication Settings
 - Validate Status Monitor
- Service & Diagnostics
 - Battery Status
 - Validate hardware and software revision
 - Troubleshooting Status Signals
 - Firmware Upgrades

HHD Specifications

- 3.5 in LCD display
- Touch Screen with Backlit Keypad
- 32-bit processor
- Operating System: Windows Mobile 5.0
- Memory: 128 MB RAM / 256 MB ROM
- Battery: Rechargeable 3.7 V, 1,230mAH, Li-ion
- Dimensions (HWD): 5.3" X 2.9" X 0.7" (13.5 cm x 7.3 cm x 1.8 cm)
- Weight: 0.42 lbs (190 g)
- 4 ft. (1.2 m) drop to steel surface, 2 drops per 6 sides

HHD Compatible Devices and Required Cable and Adaptors

| Devices | Cable and Adaptors |
|---|----------------------|
| AD-Series Locks and Accessories | HH-USB |
| BE367, KC-2, CM, CL, CT500, CT1000, CL-Controller | HH-Serial + CIP |
| WA-Series PIM | HH-Serial + PIMWA-CV |

ORDERING INFORMATION

HHD – Handheld Device with SUS installed and HH-USB cable

HH-USB – USB Cable

HH-SERIAL – Serial Cable used to connect HHD to CIP

PIMWA-CV – Converter used to connect HH-SERIAL to WA-Series PIM

P512112 – CIP, utilized with HH-SERIAL to connect to CM, CL and KC-2 locks

